

NOCCHI MULTINOX-A

SELF-PRIMING MULTISTAGE CENTRIFUGAL PUMPS



STRONG AND RESISTANT, SELF PRIMING, HIGH SUCTION CAPABILITY, SPECIAL PATENTED BRASS VALVE FOR CLOSURE DURING THE PRIMING STAGE

The horizontal multistage centrifugal self-priming MULTINOX-A pumps are suitable for developing a considerable pressure and flow rate with extremely silent operation and with minimum electrical energy consumption.

MOTOR

- Enclosed, externally ventilated
- Level of protection IP 44
- Class F insulation
- Single phase power supply with capacitor permanently activated and thermal protection built into the motor winding
- Three phase power supply with external protection provided by the user
- Speed of rotation 2850 rpm
- Suitable for continuous use

DESIGN FEATURES

APPLICATIONS


- Pumping and distribution of water in domestic systems used on a continuous or intermittent basis
- Booster systems
- Washing systems, garden irrigation, fountains



USAGE LIMITATIONS

- Type of liquid: clean water with no suspended solids or abrasive material
- Maximum liquid temperature 50°C
- Maximum recommended suction height 8 m with foot valve
- Maximum operating pressure 9 bar

Component		Material
1	Outer liner (pump body)	X5 CrNi 1810 (AISI 304) Stainless steel
2	Suction flange	EN GJL 200 (ex G20) Cast iron
3	Impeller	Technopolymer with AISI 304 stainless steel shim ring
4	Diffusor	Technopolymer
5	Shaft (hydraulic end)	X5 CrNi 1810 (AISI 304) Stainless steel
6	Mechanical seal	Graphite
7	Counterface	Ceramic
8	O-rings	NBR 70 shore
9	Discharge flange Motor bracket	EN GJL 200 (ex G20) Cast iron

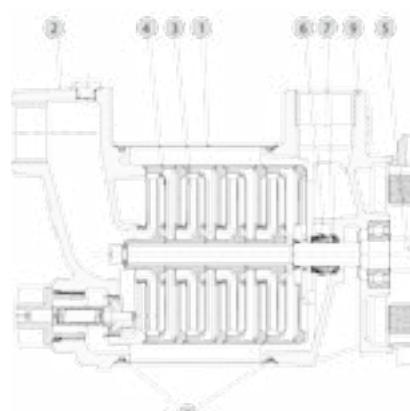

NOCCHI MULTINOX-A

SELF-PRIMING MULTISTAGE CENTRIFUGAL PUMPS

HYDRAULIC PERFORMANCE

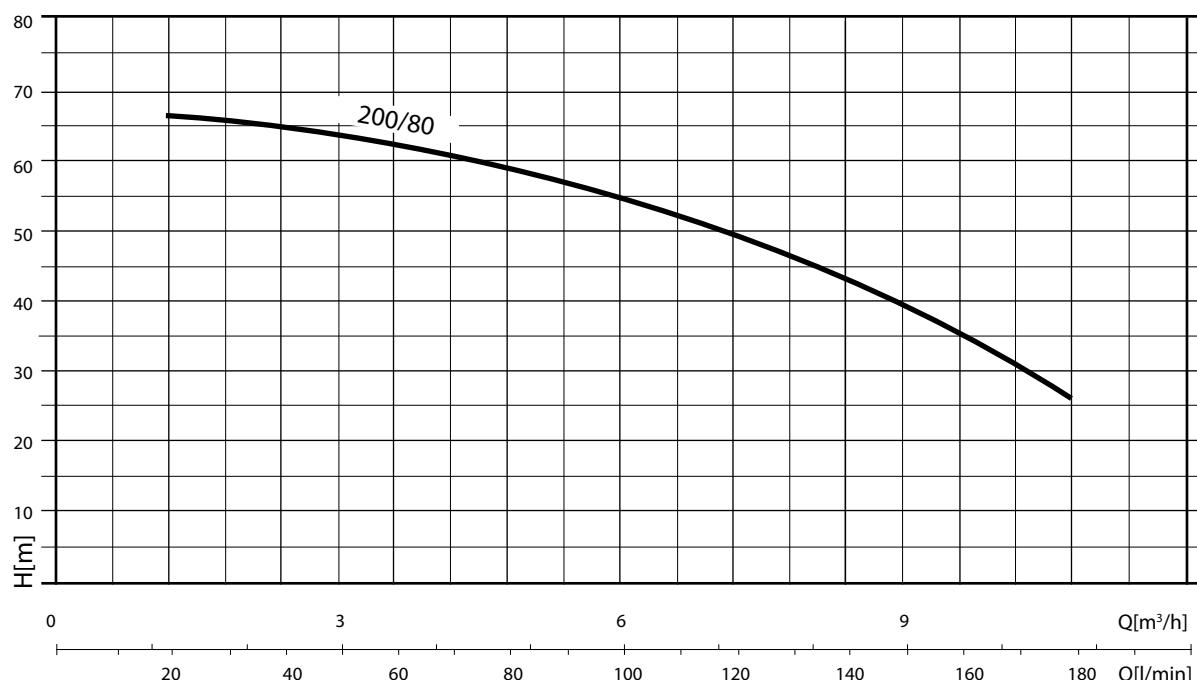


TABLE OF PERFORMANCE

MODEL	Power (P2)		Power (P1)		VOLT	In (A)	μ F	Q	L/1'	20	60	100	140	180
	HP	kW	HP	kW					m^3/h	1,2	3,6	6	8,4	10,8
MULTINOX-A 200/80 T	2,3	1,7	3,2	2,4	3 - 230 ÷ 400 V	8,3-4,8			m.c.w	67,3	64,1	55,2	42,9	26,2

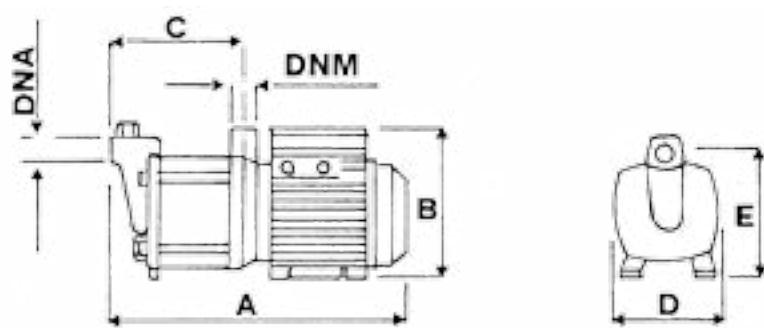


TABLE OF SIZES AND WEIGHTS

MODEL	Dimensions mm.							Weight (Kg)
	A	B	C	D	E	DNA	DNM	
MULTINOX-A 200/80 T	525	200	270	155	170	1" 1/4	1" 1/4	25