



Two impeller compact centrifugal pumps for constructing pressurisation systems for civil and industrial plant: guarantee good ratio between pressure and flow rate.

Construction features	
Pump body	cast iron
Motor bracket	cast iron
Impeller	Noryl® or brass
Mechanical seal	ceramic-graphite-NBR
Motor shaft	stainless steel AISI 303
Liquid temperature	0 - 50 °C
Operating pressure	max 8 bar


Motor	
	3~ 230/400V - 50Hz
2 Poles induction motor	1~ 230V - 50Hz (with thermal protection)
Insulation class	F
Protection degree	IPX4

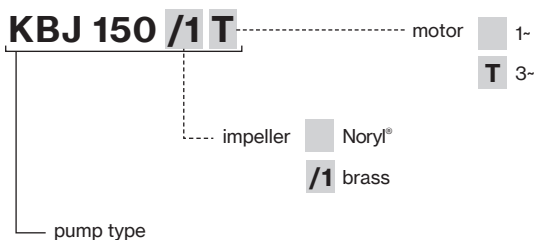


TYPE	LOTS			
	TRUCK		CONTAINER	
	PALLET (cm)	N° pumps	PALLET (cm)	N° pumps
KBJ	85×110×130	40	85×110×190	60

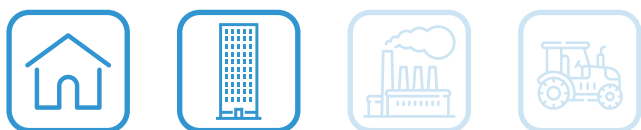



KBJ

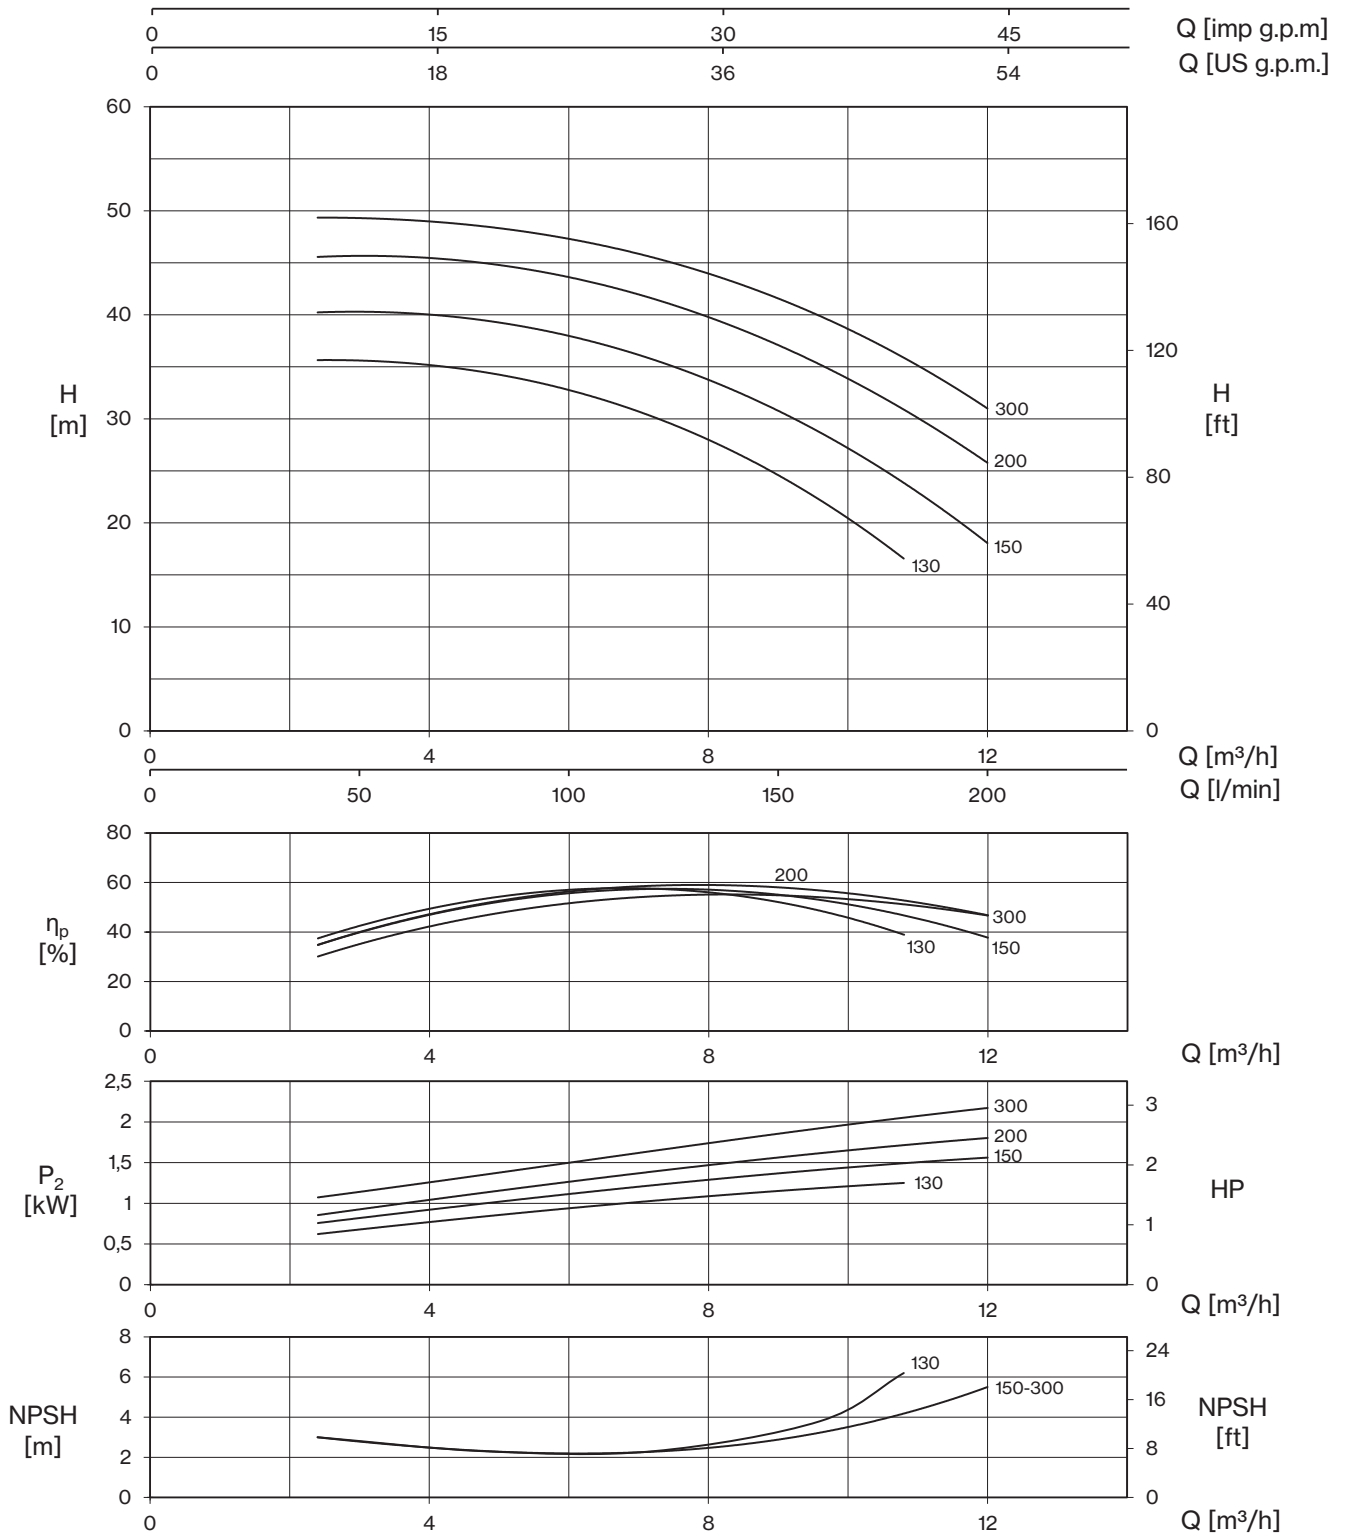

TYPE		P2		P1 (kW)		AMPERE		Q (m³/h - l/min)						
1~	3~	HP	kW	1~	3~	1~ 230V 50 Hz	3~ 400V 50 Hz	0	2,4	4,8	7,2	9,6	10,8	12
								0	40	80	120	160	180	200
								H (m)						
KBJ 130	-	1,8	1,3	1,6	-	7,4	-	35,1	35,6	34,5	30,2	22,2	16,6	
KBJ 150	KBJ 150T	2	1,5	2,0	1,9	8,9	3,7	39,2	40,2	39,5	35,7	28,7	23,9	18,0
KBJ 200	KBJ 200T	2,5	1,85	2,3	2,2	10,4	4,4	44,9	45,6	44,8	41,7	35,2	30,8	25,8
KBJ 300	KBJ 300T	3	2,2	2,6	2,5	12,4	5,1	49,5	49,4	48,3	45,8	39,8	35,8	31,1

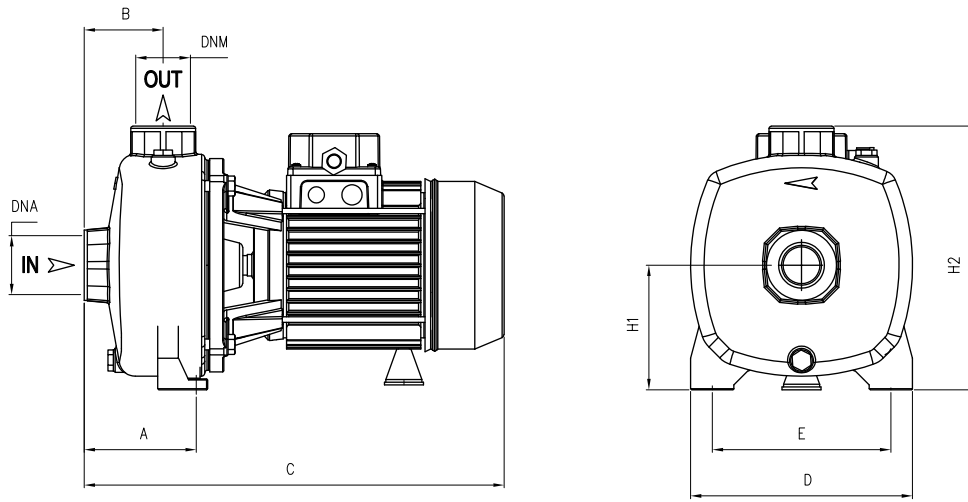

TYPE		DIMENSIONS (mm)											 Kg		
~1	~3	A	B	C	D	E	H1	H2	DNA	DNM	I	L	M	~1	~3
KBJ 130	-	108	73	415	205	165	115	242	1" ½ G	1" ¼ G	433	220	287	23,5	-
KBJ 150	KBJ 150T	108	73	415	205	165	115	242			433	220	287	24	25
KBJ 200	KBJ 200T	108	73	415	205	165	115	242			433	220	287	25,5	25
KBJ 300	-	108	73	485	205	165	115	242			520	235	320	34	-
-	KBJ 300T	108	73	415	205	165	115	242			433	220	287	-	26,5